

## LOCTITE® 518™

May 2021

### PRODUCT DESCRIPTION

LOCTITE® 518™ provides the following product characteristics:

<b>Technology</b>	Acrylic
<b>Chemical Type</b>	Dimethacrylate ester
<b>Appearance (uncured)</b>	Red gel-like material
<b>Fluorescence</b>	Positive under UV light
<b>Viscosity</b>	Thixotropic
<b>Cure</b>	Anaerobic
<b>Secondary Cure</b>	Activator
<b>Application</b>	Sealing
<b>Strength</b>	Medium

LOCTITE® 518™ is a single component, medium strength, anaerobic sealant which cures when confined in the absence of air between close fitting metal surfaces and provides resistance to low pressures immediately after assembly of flanges. The thixotropic nature of LOCTITE® 518™ reduces the migration of liquid product after application to the substrate. LOCTITE® 518™ provides robust curing performance. It not only works on active metals (e.g. mild steel) but also on passive substrates such as aluminum with a low copper content. The product offers gap performance to 0.25 mm (0.01 in) and contamination tolerance. It cures in the presence of minor surface contaminations from various oils, such as cutting, lubrication, anti-corrosion and protection fluids and cleaners containing surfactants and corrosion inhibitors. Typical applications include sealing close fitting joints between rigid metal faces and flanges as a form-in-place gasket, e.g. gearbox and engine casings, etc.

### TYPICAL PROPERTIES OF UNCURED MATERIAL

Specific Gravity @ 23 °C	1.1
Viscosity, Brookfield - HBT, 25 °C, mPa·s (cP):	4,000,000
Spindle TC, speed 0.5 rpm, Helipath	

### Instant Sealing Capability


Anaerobic sealants have the ability to resist low on-line test pressures while uncured. This test was performed with uncured product immediately after assembly of an annular steel sealing surface with an internal diameter of 50 mm (2 in) and an external diameter of 70 mm (2.8 in). Note: Instant sealing capability by application of pen roller will be limited to 0.125 mm (0.005 in) due to the applied film thickness.

Pressure Resistance, MPa:	
Induced Gap 0.05 mm	1.35
Induced Gap 0.125 mm	0.14
Induced Gap 0.25 mm	0.1

### TYPICAL CURING PERFORMANCE


#### Cure Speed vs. Substrate

The rate of cure will depend on the substrate used. The graph below shows the shear strength developed with time @ 23°C on grit blasted steel lap shears compared to different materials and tested according to ISO 4587.

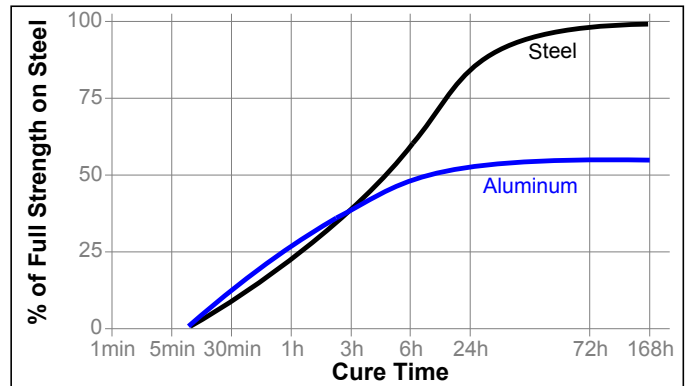


#### Cure Speed vs. Bond Gap

The rate of cure will depend on the bondline gap. The following graph shows shear strength developed with time @ 23°C on grit blasted steel lap shears at different controlled gaps and tested according to ISO 4587.

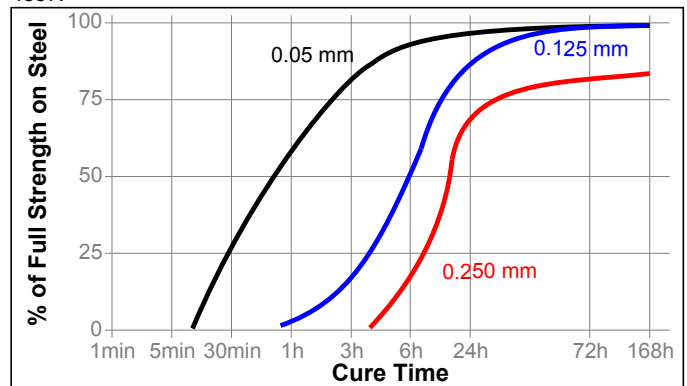

#### Cure Speed vs. Temperature


The rate of cure will depend on the ambient temperature. The graph below shows the shear strength developed with time @ 23°C on grit blasted steel lap shears different temperatures and tested according to ISO 4587.

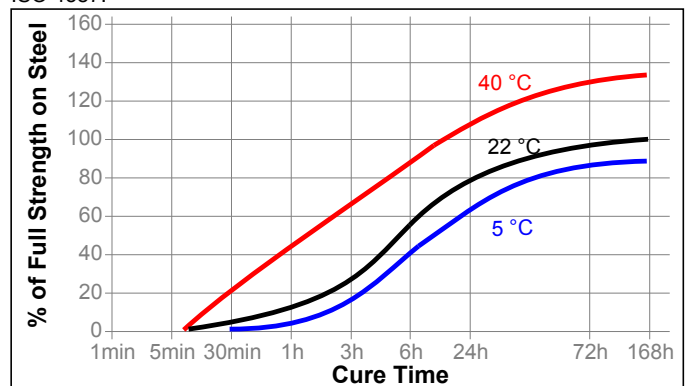

#### Cure Speed vs. Activator

Where cure speed is unacceptably long, or large gaps are present, applying activator to the surface will improve cure speed. The graph below shows the shear strength developed with time @ 23°C on grit blasted steel lap shears using Activator SF 7471™ or SF 7649™ and tested according to ISO 4587.



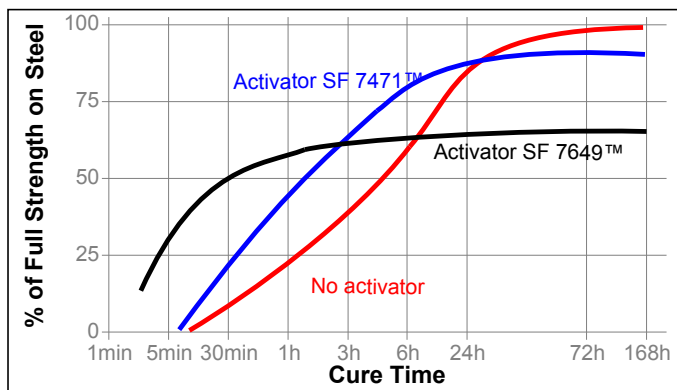

**TYPICAL PERFORMANCE OF CURED MATERIAL**

**Physical Properties**

Cured for 24 hours @ 23°C  
 Glass Transition Temperature ISO 11359-2, °C 100  
 Coefficient of Thermal Expansion, ISO 11359-2, K<sup>-1</sup>:  
 Below Tg 145×10<sup>-6</sup>  
 Above Tg 160×10<sup>-6</sup>  
 Elongation, at break, ISO 527-2, % 64  
 Tensile Strength, ISO 527-2 N/mm<sup>2</sup> 7.3 (psi) (1,060)  
 Tensile Modulus, ISO 527-2 N/mm<sup>2</sup> 54 (psi) (7,850)

**Adhesive Properties**

Cured for 1 hour @ 23°C  
 Compressive Shear Strength, ISO 10123:  
 Steel pins and collars N/mm<sup>2</sup> 5 (psi) (730)

Cured for 24 hours @ 23°C  
 Compressive Shear Strength, ISO 10123:  
 Steel pins and collars N/mm<sup>2</sup> 5 (psi) (730)

Lap Shear Strength :  
 Mild Steel (grit blasted) N/mm<sup>2</sup> 8.4 (psi) (1,220)  
 Mild Steel N/mm<sup>2</sup> 5.5 (psi) (800)  
 Aluminum N/mm<sup>2</sup> 5.4 (psi) (780)  
 Aluminum (Alclad) N/mm<sup>2</sup> 2.2 (psi) (320)  
 Mild Steel (grit blasted) to Aluminum N/mm<sup>2</sup> 6.7 (psi) (970)

Cured for 72 hours @ 23°C  
 Lap Shear Strength :

Mild Steel (grit blasted)	N/mm <sup>2</sup> 11 (psi) (1,530)
Mild Steel	N/mm <sup>2</sup> 5.5 (psi) (800)
Aluminum	N/mm <sup>2</sup> 5.8 (psi) (840)
Aluminum (Alclad)	N/mm <sup>2</sup> 1.6 (psi) (230)
Mild Steel (grit blasted) to Aluminum	N/mm <sup>2</sup> 6.7 (psi) (970)

Tensile Strength, ISO 6922:  
 Grit blasted mild steel pin N/mm<sup>2</sup> 10 (psi) (1,450)  
 Aluminum pins N/mm<sup>2</sup> 13 (psi) (1,930)

**Sealing Capability**

An annular shaped gasket with an inner diameter of 50 mm and an external diameter of 70 mm was tested up to 1.3 MPa for leakage (immersion in water for 1 minute). Product was cured for 20 hours.

Sealed to Maximum Induced Gap, mm:  
 Mild steel 0.25  
 Aluminum 0.25


**TYPICAL ENVIRONMENTAL RESISTANCE**

The following tests refer to the effect of environment on strength. This is not a measure of sealing performance.

Cured for 1 week @ 23°C.  
 Lap Shear Strength ISO 4587:  
 Steel (grit blasted)

**Hot Strength**

Tested at temperature

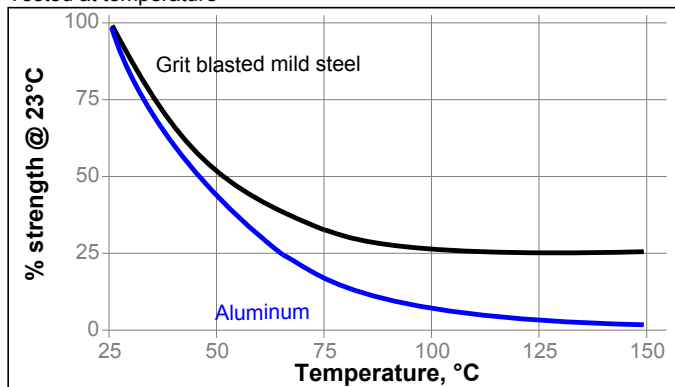


**Cold Strength**

This product has been tested to -75°C (-100 F). This product may work below this temperature, but has not been tested.

**Heat Aging**

Aged at temperature indicated and tested @ 23 °C



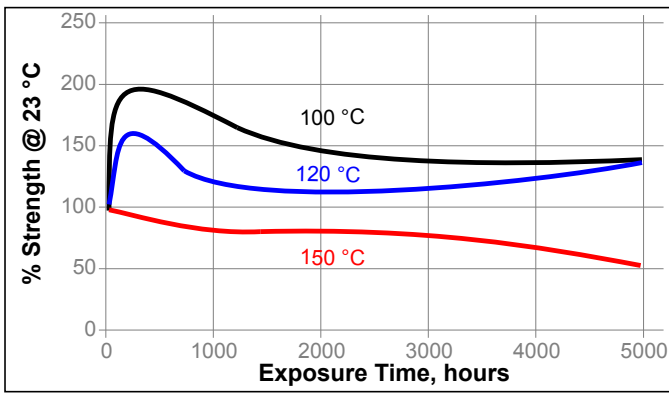

#### Chemical/Solvent Resistance

Aged under conditions indicated and tested @ 23 °C

Environment	°C	% of initial strength			
		500 h	1000 h	3000 h	5000 h
Motor oil (5W30 -Synthetic)	120	175	115	110	145
Motor oil (5W30 -Synthetic)	150	55	50	50	50
Water/glycol 50/50	87	80	65	65	55
ATF	120	175	100	105	140
ATF	150	60	40	40	40
Unleaded gasoline	23	15	10	10	5
DEF (AdBlue®)	23	95	65	70	85

#### GENERAL INFORMATION

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected as a sealant for chlorine or other strong oxidizing materials.

For safe handling information on this product, consult the Safety Data Sheet (SDS).

Where aqueous washing systems are used to clean the surfaces before bonding, it is important to check for compatibility of the washing solution with the adhesive. In some cases these aqueous washes can affect the cure and performance of the adhesive.

This product is not normally recommended for use on plastics (particularly thermoplastic materials where stress cracking of the plastic could result). Users are recommended to confirm compatibility of the product with such substrates.

#### Directions for use:

- For best performance bond surfaces should be clean and free from grease and other contaminants.
- The product is designed for close fitting flanged parts with gaps up to 0.25 mm (0.01 in).
- Apply manually as a continuous bead, a rolled film or by screen printing to one surface of the flanges. For gaps greater than 0.125mm (0.005 in) using a pen roller, a rolled film should be applied to both flange surfaces.
- Low pressures (<0.05 MPa, <7 psi) may be used when testing to confirm a complete seal immediately after assembly and before curing.
- Flanges should be tightened as soon as possible after assembly to avoid shimming.

#### Storage

Store product in the unopened container in a dry location. Storage information may be indicated on the product container labeling.

**Optimal Storage: 8 °C to 21 °C. Storage below 8 °C or greater than 28 °C can adversely affect product properties.**

Material removed from containers may be contaminated during use. Do not return product to the original container. Henkel Corporation cannot assume responsibility for product which has been contaminated

or stored under conditions other than those previously indicated. If additional information is required, please contact your local Henkel representative.

#### Product Specification

The technical data contained herein are intended as reference only and are not considered specifications for the product. Product specifications are located on the Certificate of Analysis or please contact Henkel representative.

#### Approval and Certificate

Please contact a Henkel representative for related approval or certificate of this product.

#### Data Ranges

The data contained herein may be reported as a typical value and/or range. Values are based on actual test data and are verified on a periodic basis.

Temperature/Humidity Ranges: 23 °C / 50% RH = 23+2 °C / 50+5% RH.

#### Conversions

(°C x 1.8) + 32 = °F  
 kV/mm x 25.4 = V/mm  
 mm / 25.4 = inches  
 µm / 25.4 = mil  
 N x 0.225 = lb  
 N/mm x 5.71 = lb/in  
 N/mm<sup>2</sup> x 145 = psi  
 MPa x 145 = psi  
 N·m x 8.851 = lb·in  
 N·m x 0.738 = lb·ft  
 N·mm x 0.142 = oz·in  
 mPa·s = cP

#### Disclaimer

The information provided in this Technical Data Sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. The product can have a variety of different applications as well as differing application and working conditions in your environment that are beyond our control. Henkel is, therefore, not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product.

Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

**In case products are delivered by Henkel Belgium NV, Henkel Electronic Materials NV, Henkel Nederland BV, Henkel Technologies France SAS and Henkel France SA please additionally note the following:**

In case Henkel would be nevertheless held liable, on whatever legal ground, Henkel's liability will in no event exceed the amount of the concerned delivery.

**In case products are delivered by Henkel Colombiana, S.A.S. the following disclaimer is applicable:**

The information provided in this Technical Data Sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. Henkel is not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product.

Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

**In case products are delivered by Henkel Corporation or Henkel Canada, Inc. the following disclaimer is applicable:**

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling and use thereof. In light of the foregoing, **Henkel Corporation specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use**



of Henkel Corporation's products. Henkel Corporation specifically disclaims any liability for consequential or incidental damages of any kind, including lost profits. The discussion herein of various processes or compositions is not to be interpreted as representation that they are free from domination of patents owned by others or as a license under any Henkel Corporation patents that may cover such processes or compositions. We recommend that each prospective user test his proposed application before repetitive use, using this data as a guide. This product may be covered by one or more United States or foreign patents or patent applications.

**Trademark usage**

Except as otherwise noted, all trademarks in this document are trademarks of Henkel Corporation in the U.S. and elsewhere. ® denotes a trademark registered in the U.S. Patent and Trademark Office.

