





















Update: 01/2024

 ACCIAIO INOX AISI 316L STAINLESS STEEL AISI 316L EDELSTAHL AISI 316L		 15-108
 Germany	  **	
 France	 	
 Austria	 *	
 Norway	  *	
 Sweden		
 Netherlands		
 Switzerland		
 Denmark	  *	
 Russia		
 Italy	 	
 Czech Rep.	 * 	
 Australia	  *	
 Poland	   *	
 USA		

 ACCIAIO INOX GAS AISI 316L STAINLESS STEEL GAS AISI 316L EDELSTAHL GAS AISI 316L	
 Germany	
 Austria	 *

 ACCIAIO AL CARBONIO CARBON STEEL C-STAHL	
 Germany	 **
 France	 *
 Sweden	
 Czech Rep.	 * 
 Poland	  *
 Australia	 *

* Omologazione ottenuta direttamente dal distributore.



Approval obtained directly by our distributor.

Inhaber der Zulassung ist unser Vertreter.

** Gamma omologata **VdS** da Ø22 a Ø108 mm, valida esclusivamente per l'utilizzo abbinato di tubi e raccordi Eurotubi Europa.

VdS approved range from Ø22 to Ø108 mm, valid only for the combined use of Eurotubi Europa pipes and fittings.

VdS zugelassen von Ø22 - 108 mm, gilt ausschliesslich bei Verwendung von Eurotubi Fittings kombiniert mit Eurotubi Europa Rohren.

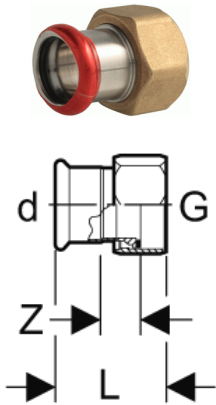


Girella con dado in ottone e guarnizione piatta in EPDM

Adaptor with union nut in brass and EPDM flat seal

Anschlussverschraubung mit EPDM-Flachdichtung und Messingmutter

Code	d - G (ISO 228)	L	Z			MOQ
C60QC-LBP	15-G ³ / ₄	35	12	70	10	100
C60QD-LBP	18-G ³ / ₄	37	9	72	10	100
C60RE-LBP	22-G1	39	7	105	10	60
C60SF-LBP	28-G1 ¹ / ₄	44	10	180	10	50
C60TG-LBP	35-G1 ¹ / ₂	48	11	275	8	40
C60UH-LBP	42-G1 ³ / ₄	53	9	307	4	20
C60WJ-LBP	54-G2 ³ / ₈	61	10	470	4	12

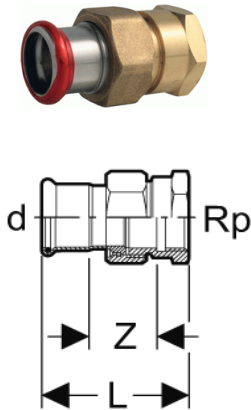


Girella con dado in ottone, raccordo femmina e guarnizione piatta in EPDM

Adaptor union with female thread, brass nut and EPDM flat seal

Übergangverschraubung I.G. mit EPDM-Flachdichtung und Messingmutter

Code	d - Rp	L	Z			MOQ
C62PC-LBP	15-Rp ¹ / ₂	59	27	160	10	40
C62QC-LBP	15-Rp ³ / ₄	60	27	195	10	40
C62PD-LBP	18-Rp ¹ / ₂	61	29	165	10	40
C62QD-LBP	18-Rp ³ / ₄	62	29	188	10	40
C62QE-LBP	22-Rp ³ / ₄	63	28	220	10	40
C62RE-LBP	22-Rp1	67	30	274	10	40
C62RF-LBP	28-Rp1	71	33	440	10	30
C62SG-LBP	35-Rp1 ¹ / ₄	77	34	535	8	24
C62TH-LBP	42-Rp1 ¹ / ₂	82	33	610	4	16
C62VJ-LBP	54-Rp2	95	37	1.110	4	16

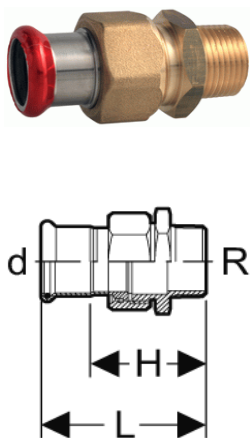

Girella con dado in ottone, raccordo maschio e guarnizione piatta in EPDM

Adaptor union with male thread, brass nut and EPDM flat seal

Übergangverschraubung A.G. mit EPDM-Flachdichtung und Messingmutter

Code	d - R	L	H			MOQ
C64PC-LBP	15-R ¹ / ₂	61	41	138	10	40
C64QC-LBP	15-R ³ / ₄	65	44	170	10	40
C64PD-LBP	18-R ¹ / ₂	64	43	140	10	40
C64QD-LBP	18-R ³ / ₄	67	46	160	10	40
C64PE-LBP	22-R ¹ / ₂	67	44	250	10	40
C64QE-LBP	22-R ³ / ₄	69	46	220	10	40
C64RE-LBP	22-R1	73	50	290	10	40
C64RF-LBP	28-R1	76	52	440	10	30
C64SG-LBP	35-R1 ¹ / ₄	85	59	555	8	24
C64TH-LBP	42-R1 ¹ / ₂	90	58	651	4	16
C64VJ-LBP	54-R2	104	67	1.100	4	16