



PRESSSYSTEM • PRESS SYSTEM

WERTE DER ÖRTLICHEN DRUCKVERLUSTE


VALUES OF LOCALISED LOSS OF PRESSURE

VALORI DEL COEFFICIENTE DI PERDITA LOCALIZZATA




WERTE DER ÖRTLICHEN DRUCKVERLUSTE ξ (csi) $t = 18^\circ\text{C}$, $\rho = 999 \text{ Kg/m}^3$

KUPPLUNG




		1,0 m/s	2,0 m/s	3,0 m/s
16 x 16	ξ	8,810	6,310	6,140
	l/sec	0,113	0,226	0,339
20 x 20	ξ	2,200	2,150	1,620
	l/sec	0,201	0,402	0,603
26 x 26	ξ	1,600	1,500	1,470
	l/sec	0,314	0,628	0,942
32 x 32	ξ	0,600	0,600	0,600
	l/sec	0,531	1,062	1,593

WINKEL 90°




		1,0 m/s	2,0 m/s	3,0 m/s
16 x 16	ξ	21,820	17,370	14,730
	l/sec	0,113	0,226	0,339
20 x 20	ξ	10,410	7,560	6,980
	l/sec	0,201	0,302	0,603
26 x 26	ξ	7,810	6,260	6,540
	l/sec	0,314	0,628	0,942
32 x 32	ξ	4,000	4,300	4,180
	l/sec	0,531	1,062	1,593

T-STÜCK
GERADER DURCHFLUSS

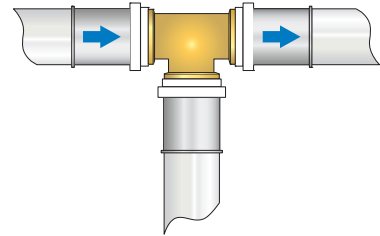


		1,0 m/s	2,0 m/s	3,0 m/s
16 x 16 x 16	ξ	12,210	7,060	6,360
	l/sec	0,113	0,226	0,339
20 x 20 x 20	ξ	3,200	2,350	2,180
	l/sec	0,201	0,402	0,603
26 x 26 x 26	ξ	2,000	1,500	1,670
	l/sec	0,314	0,628	0,942
32 x 32 x 32	ξ	1,000	1,000	0,870
	l/sec	0,531	1,062	1,593

REDUKTION




		1,0 m/s	2,0 m/s	3,0 m/s
20 x 16	ξ	12,310	8,580	7,490
	l/sec	0,113	0,226	0,339
26 x 20	ξ	2,700	2,600	2,240
	l/sec	0,201	0,402	0,603
32 x 26	ξ	2,800	2,380	2,390
	l/sec	0,314	0,628	0,942

WINKEL 45°




		1,0 m/s	2,0 m/s	3,0 m/s
26 x 26	ξ	3,200	2,550	2,650
	l/sec	0,314	0,628	0,942
32 x 32	ξ	1,600	1,550	1,560
	l/sec	0,531	1,062	1,593

T-STÜCK
UMGELENKTER DURCHFLUSS

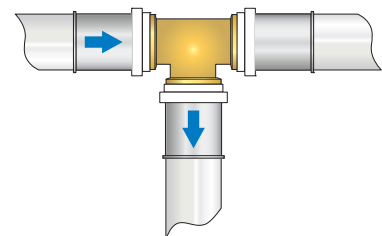


		1,0 m/s	2,0 m/s	3,0 m/s
16 x 16 x 16	ξ	23,820	17,170	15,500
	l/sec	0,113	0,226	0,339
20 x 20 x 20	ξ	10,010	8,760	7,940
	l/sec	0,201	0,402	0,603
26 x 26 x 26	ξ	7,410	6,260	6,760
	l/sec	0,314	0,628	0,942
32 x 32 x 32	ξ	4,600	4,650	4,360
	l/sec	0,531	1,062	1,593

ÜBERGANG MIT AG



		1,0 m/s	2,0 m/s	3,0 m/s
16 x 1/2"	ξ	11,810	9,860	8,030
	l/sec	0,113	0,226	0,339
20 x 3/4"	ξ	4,800	3,500	2,960
	l/sec	0,201	0,402	0,603
26 x 1"	ξ	3,400	2,350	2,400
	l/sec	0,314	0,628	0,942
32 x 1 1/4"	ξ	1,400	1,600	1,470
	l/sec	0,531	1,062	1,593

WANDWINKEL




		1,0 m/s	2,0 m/s	3,0 m/s
16 x 1/2"	ξ	26,830	20,170	16,170
	l/sec	0,113	0,226	0,339
20 x 3/4"	ξ	12,410	9,710	9,030
	l/sec	0,201	0,402	0,603




WERTE DER ÖRTLICHEN DRUCKVERLUSTE ξ (csi) $t = 18^\circ\text{C}$, $\rho = 999 \text{ Kg/m}^3$

**T-STÜCK REDUZIERT
GERADER DURCHFLUSS**

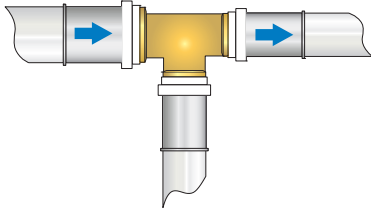


		1,0 m/s	2,0 m/s	3,0 m/s
20 x 16 x 16	ξ	14,710	11,440	8,800
	l/sec	0,113	0,226	0,339
20 x 20 x 16	ξ	12,110	11,090	8,860
	l/sec	0,113	0,226	0,339
26 x 16 x 20	ξ	3,500	2,800	2,320
	l/sec	0,201	0,402	0,603
26 x 20 x 16	ξ	11,110	8,430	7,440
	l/sec	0,113	0,226	0,339
26 x 20 x 20	ξ	4,100	2,650	2,210
	l/sec	0,201	0,402	0,603
26 x 26 x 16	ξ	11,51	8,480	7,330
	l/sec	0,113	0,226	0,339
26 x 26 x 20	ξ	3,500	2,700	2,390
	l/sec	0,201	0,402	0,603
32 x 20 x 26	ξ	3,200	2,680	2,810
	l/sec	0,314	0,628	0,942
32 x 32 x 20	ξ	4,800	3,930	3,340
	l/sec	0,201	0,402	0,603
32 x 32 x 26	ξ	3,400	2,580	2,550
	l/sec	0,314	0,628	0,942

**T-STÜCK REDUZIERT
UMGELENKTER DURCHFLUSS**

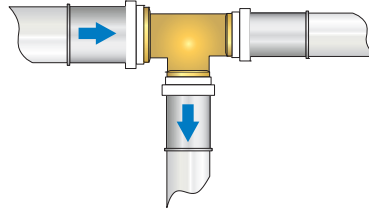


		1,0 m/s	2,0 m/s	3,0 m/s
20 x 16 x 16	ξ	14,510	13,04	10,870
	l/sec	0,113	0,226	0,339
20 x 20 x 16	ξ	9,410	8,360	7,790
	l/sec	0,201	0,402	0,603
26 x 16 x 20	ξ	14,710	11,990	10,420
	l/sec	0,113	0,226	0,339
26 x 20 x 16	ξ	6,710	6,010	5,310
	l/sec	0,201	0,402	0,603
26 x 20 x 20	ξ	7,110	5,760	5,150
	l/sec	0,201	0,402	0,603
26 x 26 x 16	ξ	8,010	7,360	7,500
	l/sec	0,314	0,628	0,942
26 x 26 x 20	ξ	8,010	6,760	7,070
	l/sec	0,314	0,628	0,942
32 x 20 x 26	ξ	6,610	5,330	4,520
	l/sec	0,201	0,402	0,603
32 x 32 x 20	ξ	4,800	5,960	6,090
	l/sec	0,531	1,062	1,593
32 x 32 x 26	ξ	4,800	5,110	5,050
	l/sec	0,531	1,062	1,593

**T-STÜCK ERWEITERT
GERADER DURCHFLUSS**

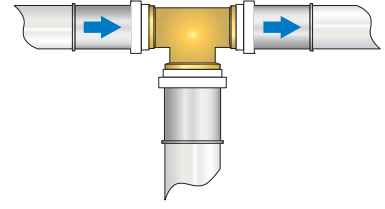


		1,0 m/s	2,0 m/s	3,0 m/s
16 x 20 x 16	ξ	10,210	7,410	6,940
	l/sec	0,113	0,226	0,339
20 x 26 x 20	ξ	3,800	2,850	2,540
	l/sec	0,201	0,402	0,603
26 x 32 x 26	ξ	2,800	2,600	2,380
	l/sec	0,314	0,628	0,942

**T-STÜCK ERWEITERT
UMGELENKTER DURCHFLUSS**

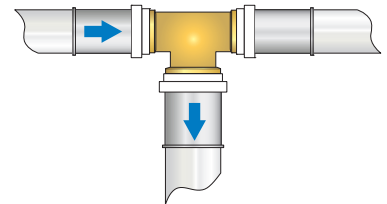


		1,0 m/s	2,0 m/s	3,0 m/s
16 x 20 x 16	ξ	14,91	10,590	10,070
	l/sec	0,113	0,226	0,339
20 x 26 x 20	ξ	5,710	5,160	4,530
	l/sec	0,201	0,402	0,603
26 x 32 x 26	ξ	5,610	4,780	4,730
	l/sec	0,314	0,628	0,942

**T-STÜCK MITTELABGANG REDUZIERT
GERADER DURCHFLUSS**

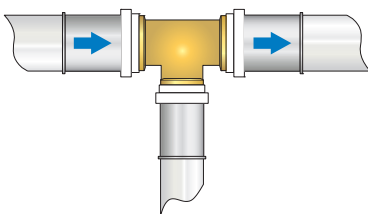


		1,0 m/s	2,0 m/s	3,0 m/s
20 x 16 x 20	ξ	2,600	2,100	1,780
	l/sec	0,201	0,402	0,603
26 x 20 x 26	ξ	2,400	2,050	1,870
	l/sec	0,314	0,628	0,942
32 x 20 x 32	ξ	0,800	0,800	0,760
	l/sec	0,531	1,062	1,593


**T-STÜCK MITTELABGANG REDUZIERT
UMGELENKTER DURCHFLUSS**

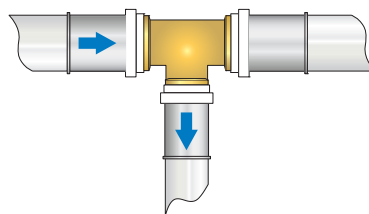


		1,0 m/s	2,0 m/s	3,0 m/s
20 x 16 x 20	ξ	14,910	11,94	11,270
	l/sec	0,113	0,226	0,339
26 x 20 x 26	ξ	7,910	5,860	5,280
	l/sec	0,201	0,402	0,603
32 x 20 x 32	ξ	5,610	4,930	4,290
	l/sec	0,201	0,402	0,603


 VALUES OF LOCALISED LOSS OF PRESSURE ξ (csi) $t = 18^\circ\text{C}$, $\rho = 999 \text{ Kg/m}^3$
COUPLING



		1,0 m/s	2,0 m/s	3,0 m/s
16 x 16	ξ	8,810	6,310	6,140
	l/sec	0,113	0,226	0,339
20 x 20	ξ	2,200	2,150	1,620
	l/sec	0,201	0,402	0,603
26 x 26	ξ	1,600	1,500	1,470
	l/sec	0,314	0,628	0,942
32 x 32	ξ	0,600	0,600	0,600
	l/sec	0,531	1,062	1,593

REDUCING COUPLING



		1,0 m/s	2,0 m/s	3,0 m/s
20 x 16	ξ	12,310	8,580	7,490
	l/sec	0,113	0,226	0,339
26 x 20	ξ	2,700	2,600	2,240
	l/sec	0,201	0,402	0,603
32 x 26	ξ	2,800	2,380	2,390
	l/sec	0,314	0,628	0,942

MALE COUPLING



		1,0 m/s	2,0 m/s	3,0 m/s
16 x 1/2"	ξ	11,810	9,860	8,030
	l/sec	0,113	0,226	0,339
20 x 3/4"	ξ	4,800	3,500	2,960
	l/sec	0,201	0,402	0,603
26 x 1"	ξ	3,400	2,350	2,400
	l/sec	0,314	0,628	0,942
32 x 1 1/4"	ξ	1,400	1,600	1,470
	l/sec	0,531	1,062	1,593

ELBOW 90°


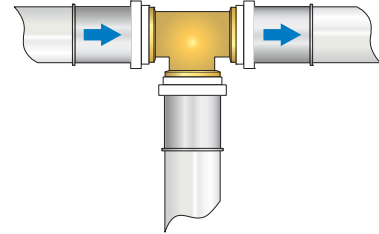
		1,0 m/s	2,0 m/s	3,0 m/s
16 x 16	ξ	21,820	17,370	14,730
	l/sec	0,113	0,226	0,339
20 x 20	ξ	10,410	7,560	6,980
	l/sec	0,201	0,302	0,603
26 x 26	ξ	7,810	6,260	6,540
	l/sec	0,314	0,628	0,942
32 x 32	ξ	4,000	4,300	4,180
	l/sec	0,531	1,062	1,593

ELBOW 45°


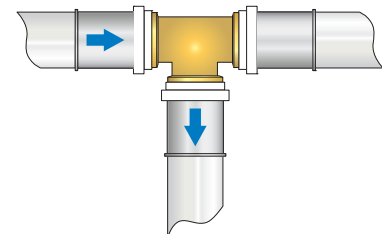
		1,0 m/s	2,0 m/s	3,0 m/s
26 x 26	ξ	3,200	2,550	2,650
	l/sec	0,314	0,628	0,942
32 x 32	ξ	1,600	1,550	1,560
	l/sec	0,531	1,062	1,593

WALLPLATE


		1,0 m/s	2,0 m/s	3,0 m/s
16 x 1/2"	ξ	26,830	20,170	16,170
	l/sec	0,113	0,226	0,339
20 x 3/4"	ξ	12,410	9,710	9,030
	l/sec	0,201	0,402	0,603

TEE STRAIGHT FLOW


		1,0 m/s	2,0 m/s	3,0 m/s
16 x 16 x 16	ξ	12,210	7,060	6,360
	l/sec	0,113	0,226	0,339
20 x 20 x 20	ξ	3,200	2,350	2,180
	l/sec	0,201	0,402	0,603
26 x 26 x 26	ξ	2,000	1,500	1,670
	l/sec	0,314	0,628	0,942
32 x 32 x 32	ξ	1,000	1,000	0,870
	l/sec	0,531	1,062	1,593


TEE DIVERTED FLOW


		1,0 m/s	2,0 m/s	3,0 m/s
16 x 16 x 16	ξ	23,820	17,170	15,500
	l/sec	0,113	0,226	0,339
20 x 20 x 20	ξ	10,010	8,760	7,940
	l/sec	0,201	0,402	0,603
26 x 26 x 26	ξ	7,410	6,260	6,760
	l/sec	0,314	0,628	0,942
32 x 32 x 32	ξ	4,600	4,650	4,360
	l/sec	0,531	1,062	1,593




VALUES OF LOCALISED LOSS OF PRESSURE ξ (csi) $t = 18^\circ\text{C}$, $\rho = 999 \text{ Kg/m}^3$

TEE REDUCED STRAIGHT FLOW

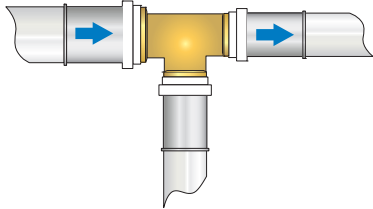


		1,0 m/s	2,0 m/s	3,0 m/s
20 x 16 x 16	ξ	14,710	11,440	8,800
	l/sec	0,113	0,226	0,339
20 x 20 x 16	ξ	12,110	11,090	8,860
	l/sec	0,113	0,226	0,339
26 x 16 x 20	ξ	3,500	2,800	2,320
	l/sec	0,201	0,402	0,603
26 x 20 x 16	ξ	11,110	8,430	7,440
	l/sec	0,113	0,226	0,339
26 x 20 x 20	ξ	4,100	2,650	2,210
	l/sec	0,201	0,402	0,603
26 x 26 x 16	ξ	11,51	8,480	7,330
	l/sec	0,113	0,226	0,339
26 x 26 x 20	ξ	3,500	2,700	2,390
	l/sec	0,201	0,402	0,603
32 x 20 x 26	ξ	3,200	2,680	2,810
	l/sec	0,314	0,628	0,942
32 x 32 x 20	ξ	4,800	3,930	3,340
	l/sec	0,201	0,402	0,603
32 x 32 x 26	ξ	3,400	2,580	2,550
	l/sec	0,314	0,628	0,942

TEE REDUCED DIVERTED FLOW

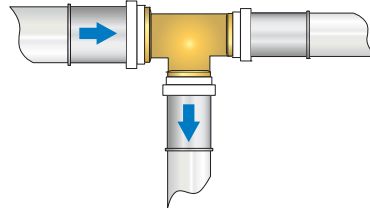


		1,0 m/s	2,0 m/s	3,0 m/s
20 x 16 x 16	ξ	14,510	13,04	10,870
	l/sec	0,113	0,226	0,339
20 x 20 x 16	ξ	9,410	8,360	7,790
	l/sec	0,201	0,402	0,603
26 x 16 x 20	ξ	14,710	11,990	10,420
	l/sec	0,113	0,226	0,339
26 x 20 x 16	ξ	6,710	6,010	5,310
	l/sec	0,201	0,402	0,603
26 x 20 x 20	ξ	7,110	5,760	5,150
	l/sec	0,201	0,402	0,603
26 x 26 x 16	ξ	8,010	7,360	7,500
	l/sec	0,314	0,628	0,942
26 x 26 x 20	ξ	8,010	6,760	7,070
	l/sec	0,314	0,628	0,942
32 x 20 x 26	ξ	6,610	5,330	4,520
	l/sec	0,201	0,402	0,603
32 x 32 x 20	ξ	4,800	5,960	6,090
	l/sec	0,531	1,062	1,593
32 x 32 x 26	ξ	4,800	5,110	5,050
	l/sec	0,531	1,062	1,593

TEE ENLARGED MIDDLE SECTION STRAIGHT FLOW

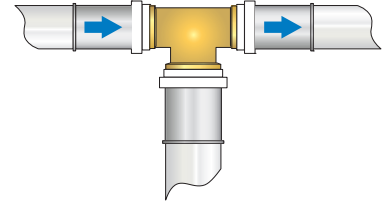


		1,0 m/s	2,0 m/s	3,0 m/s
16 x 20 x 16	ξ	10,210	7,410	6,940
	l/sec	0,113	0,226	0,339
20 x 26 x 20	ξ	3,800	2,850	2,540
	l/sec	0,201	0,402	0,603
26 x 32 x 26	ξ	2,800	2,600	2,380
	l/sec	0,314	0,628	0,942

TEE ENLARGED MIDDLE SECTION DIVERTED FLOW

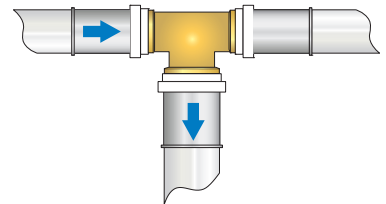


		1,0 m/s	2,0 m/s	3,0 m/s
16 x 20 x 16	ξ	14,91	10,590	10,070
	l/sec	0,113	0,226	0,339
20 x 26 x 20	ξ	5,710	5,160	4,530
	l/sec	0,201	0,402	0,603
26 x 32 x 26	ξ	5,610	4,780	4,730
	l/sec	0,314	0,628	0,942

TEE REDUCED MIDDLE SECTION STRAIGHT FLOW

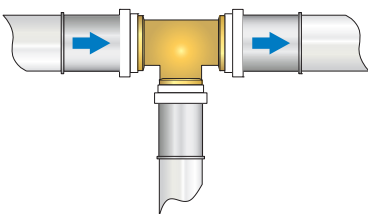

		1,0 m/s	2,0 m/s	3,0 m/s
20 x 16 x 20	ξ	2,600	2,100	1,780
	l/sec	0,201	0,402	0,603
26 x 20 x 26	ξ	2,400	2,050	1,870
	l/sec	0,314	0,628	0,942
32 x 20 x 32	ξ	0,800	0,800	0,760
	l/sec	0,531	1,062	1,593

TEE REDUCED MIDDLE SECTION DIVERTED FLOW

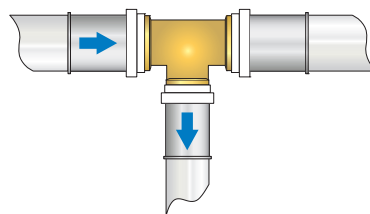


		1,0 m/s	2,0 m/s	3,0 m/s
20 x 16 x 20	ξ	14,910	11,94	11,270
	l/sec	0,113	0,226	0,339
26 x 20 x 26	ξ	7,910	5,860	5,280
	l/sec	0,201	0,402	0,603
32 x 20 x 32	ξ	5,610	4,930	4,290
	l/sec	0,201	0,402	0,603




VALORI DEL COEFFICIENTE DI PERDITA LOCALIZZATA ξ (csi) $t = 18^\circ\text{C}$, $\rho = 999 \text{ Kg/m}^3$

RACCORDO DRITTO




		1,0 m/s	2,0 m/s	3,0 m/s
16 x 16	ξ	8,810	6,310	6,140
	l/sec	0,113	0,226	0,339
20 x 20	ξ	2,200	2,150	1,620
	l/sec	0,201	0,402	0,603
26 x 26	ξ	1,600	1,500	1,470
	l/sec	0,314	0,628	0,942
32 x 32	ξ	0,600	0,600	0,600
	l/sec	0,531	1,062	1,593

CURVA 90°




		1,0 m/s	2,0 m/s	3,0 m/s
16 x 16	ξ	21,820	17,370	14,730
	l/sec	0,113	0,226	0,339
20 x 20	ξ	10,410	7,560	6,980
	l/sec	0,201	0,302	0,603
26 x 26	ξ	7,810	6,260	6,540
	l/sec	0,314	0,628	0,942
32 x 32	ξ	4,000	4,300	4,180
	l/sec	0,531	1,062	1,593

RACCORDO A T
FLUSSO PASSANTE

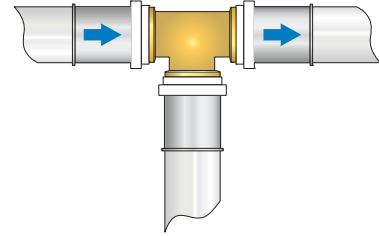


		1,0 m/s	2,0 m/s	3,0 m/s
16 x 16 x 16	ξ	12,210	7,060	6,360
	l/sec	0,113	0,226	0,339
20 x 20 x 20	ξ	3,200	2,350	2,180
	l/sec	0,201	0,402	0,603
26 x 26 x 26	ξ	2,000	1,500	1,670
	l/sec	0,314	0,628	0,942
32 x 32 x 32	ξ	1,000	1,000	0,870
	l/sec	0,531	1,062	1,593

RACCORDO DRITTO RIDOTTO




		1,0 m/s	2,0 m/s	3,0 m/s
20 x 16	ξ	12,310	8,580	7,490
	l/sec	0,113	0,226	0,339
26 x 20	ξ	2,700	2,600	2,240
	l/sec	0,201	0,402	0,603
32 x 26	ξ	2,800	2,380	2,390
	l/sec	0,314	0,628	0,942

CURVA 45°




		1,0 m/s	2,0 m/s	3,0 m/s
26 x 26	ξ	3,200	2,550	2,650
	l/sec	0,314	0,628	0,942
32 x 32	ξ	1,600	1,550	1,560
	l/sec	0,531	1,062	1,593

RACCORDO A T
FLUSSO DERIVATO

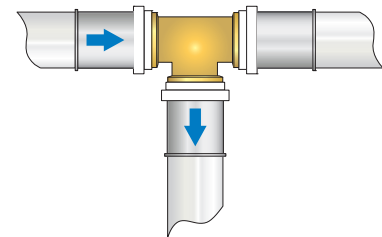


		1,0 m/s	2,0 m/s	3,0 m/s
16 x 16 x 16	ξ	23,820	17,170	15,500
	l/sec	0,113	0,226	0,339
20 x 20 x 20	ξ	10,010	8,760	7,940
	l/sec	0,201	0,402	0,603
26 x 26 x 26	ξ	7,410	6,260	6,760
	l/sec	0,314	0,628	0,942
32 x 32 x 32	ξ	4,600	4,650	4,360
	l/sec	0,531	1,062	1,593

RACCORDO DRITTO MASCHIO



		1,0 m/s	2,0 m/s	3,0 m/s
16 x 1/2"	ξ	11,810	9,860	8,030
	l/sec	0,113	0,226	0,339
20 x 3/4"	ξ	4,800	3,500	2,960
	l/sec	0,201	0,402	0,603
26 x 1"	ξ	3,400	2,350	2,400
	l/sec	0,314	0,628	0,942
32 x 1 1/4"	ξ	1,400	1,600	1,470
	l/sec	0,531	1,062	1,593

ATTACCO A MURO°




		1,0 m/s	2,0 m/s	3,0 m/s
16 x 1/2"	ξ	26,830	20,170	16,170
	l/sec	0,113	0,226	0,339
20 x 3/4"	ξ	12,410	9,710	9,030
	l/sec	0,201	0,402	0,603




VALORI DEL COEFFICIENTE DI PERDITA LOCALIZZATA ξ (csi) $t = 18^\circ\text{C}$, $\rho = 999 \text{ Kg/m}^3$

RACCORDO A T RIDOTTO
FLUSSO PASSANTE

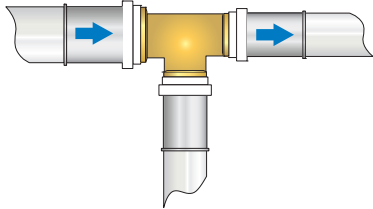


		1,0 m/s	2,0 m/s	3,0 m/s
20 x 16 x 16	ξ	14,710	11,440	8,800
	l/sec	0,113	0,226	0,339
20 x 20 x 16	ξ	12,110	11,090	8,860
	l/sec	0,113	0,226	0,339
26 x 16 x 20	ξ	3,500	2,800	2,320
	l/sec	0,201	0,402	0,603
26 x 20 x 16	ξ	11,110	8,430	7,440
	l/sec	0,113	0,226	0,339
26 x 20 x 20	ξ	4,100	2,650	2,210
	l/sec	0,201	0,402	0,603
26 x 26 x 16	ξ	11,51	8,480	7,330
	l/sec	0,113	0,226	0,339
26 x 26 x 20	ξ	3,500	2,700	2,390
	l/sec	0,201	0,402	0,603
32 x 20 x 26	ξ	3,200	2,680	2,810
	l/sec	0,314	0,628	0,942
32 x 32 x 20	ξ	4,800	3,930	3,340
	l/sec	0,201	0,402	0,603
32 x 32 x 26	ξ	3,400	2,580	2,550
	l/sec	0,314	0,628	0,942

RACCORDO A T RIDOTTO
FLUSSO DERIVATO

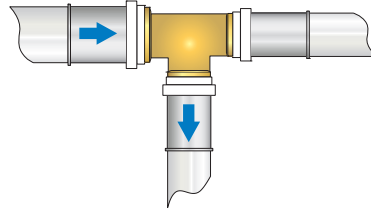


		1,0 m/s	2,0 m/s	3,0 m/s
20 x 16 x 16	ξ	14,510	13,04	10,870
	l/sec	0,113	0,226	0,339
20 x 20 x 16	ξ	9,410	8,360	7,790
	l/sec	0,201	0,402	0,603
26 x 16 x 20	ξ	14,710	11,990	10,420
	l/sec	0,113	0,226	0,339
26 x 20 x 16	ξ	6,710	6,010	5,310
	l/sec	0,201	0,402	0,603
26 x 20 x 20	ξ	7,110	5,760	5,150
	l/sec	0,201	0,402	0,603
26 x 26 x 16	ξ	8,010	7,360	7,500
	l/sec	0,314	0,628	0,942
26 x 26 x 20	ξ	8,010	6,760	7,070
	l/sec	0,314	0,628	0,942
32 x 20 x 26	ξ	6,610	5,330	4,520
	l/sec	0,201	0,402	0,603
32 x 32 x 20	ξ	4,800	5,960	6,090
	l/sec	0,531	1,062	1,593
32 x 32 x 26	ξ	4,800	5,110	5,050
	l/sec	0,531	1,062	1,593

RACCORDO A T ALLARGATO AL CENTRO
FLUSSO PASSANTE

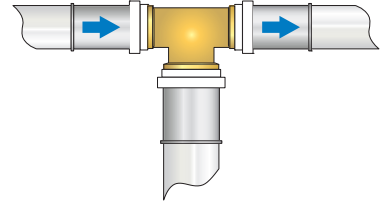


		1,0 m/s	2,0 m/s	3,0 m/s
16 x 20 x 16	ξ	10,210	7,410	6,940
	l/sec	0,113	0,226	0,339
20 x 26 x 20	ξ	3,800	2,850	2,540
	l/sec	0,201	0,402	0,603
26 x 32 x 26	ξ	2,800	2,600	2,380
	l/sec	0,314	0,628	0,942

RACCORDO A T ALLARGATO AL CENTRO
FLUSSO DERIVATO

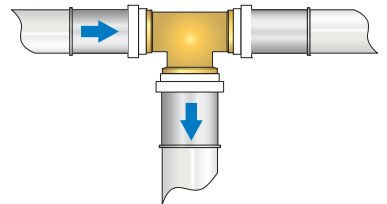


		1,0 m/s	2,0 m/s	3,0 m/s
16 x 20 x 16	ξ	14,91	10,590	10,070
	l/sec	0,113	0,226	0,339
20 x 26 x 20	ξ	5,710	5,160	4,530
	l/sec	0,201	0,402	0,603
26 x 32 x 26	ξ	5,610	4,780	4,730
	l/sec	0,314	0,628	0,942

RACCORDO A T RIDOTTO AL CENTRO
FLUSSO PASSANTE

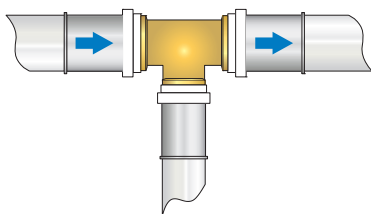

		1,0 m/s	2,0 m/s	3,0 m/s
20 x 16 x 20	ξ	2,600	2,100	1,780
	l/sec	0,201	0,402	0,603
26 x 20 x 26	ξ	2,400	2,050	1,870
	l/sec	0,314	0,628	0,942
32 x 20 x 32	ξ	0,800	0,800	0,760
	l/sec	0,531	1,062	1,593

RACCORDO A T RIDOTTO AL CENTRO
FLUSSO DERIVATO

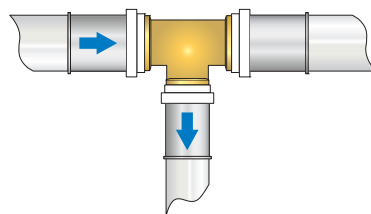

		1,0 m/s	2,0 m/s	3,0 m/s
20 x 16 x 20	ξ	14,910	11,94	11,270
	l/sec	0,113	0,226	0,339
26 x 20 x 26	ξ	7,910	5,860	5,280
	l/sec	0,201	0,402	0,603
32 x 20 x 32	ξ	5,610	4,930	4,290
	l/sec	0,201	0,402	0,603



COMISA S.P.A.
25055 PISOGLNE (BS) - ITALY
LOCALITÀ NEZIOLE - ZONA ARTIGIANALE, 27
TEL. + 39 0364.896811 - FAX +39 0364.896825 - www.comisa.it



ISO 9001:2008